


Ø80

PICODOWN50/..
downlight



Light distribution

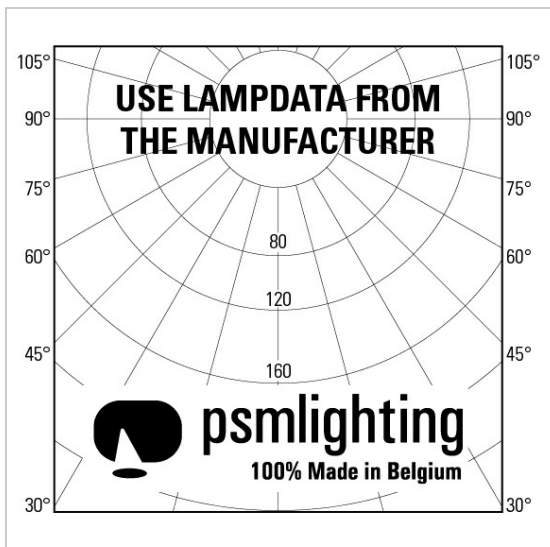

Project _____
Type _____
Nota _____
Quantity _____
Date _____

Lamp

(Bulb not included)

Lamp type	QR-CB 51
Lamp base	GU5,3/GX5,3
Quantity	1
Power	50W
Voltage	12V

Physical

Use type	Interior
Fixation type	Ceiling
Type of opening	Round
Aperture dimensions	Ø80 mm
Installation depth	80 mm
Dimensions fixture	ø89x70 mm
Spring type	S2 - flat springs
IP protection rating	IP20
Weight	0,1615 kg

Electrical

Connection voltage	~12V
Fixture class	III
Type of transformer	Without transformer
Light source replaceability	Replaceable light source by an end-user

Ø80

PICODOWN50/..
downlight

Colours

	1	white gloss	PICODOWN50.1
	11	alu grey	PICODOWN50.11
	13	bronze	PICODOWN50.13
	14	alu satin	PICODOWN50.14
	16	satin gold	PICODOWN50.16
	1M	white texture	PICODOWN50.1M
	2	black matt	PICODOWN50.2
	23	dark bronze	PICODOWN50.23
	2M	black tex	PICODOWN50.2M
	4	shiny gold	PICODOWN50.4
	45	sun gold	PICODOWN50.45
	5	inox 316	PICODOWN50.5

Options

S6.80/..	plasterkit	PLASTERKIT
----------	------------	------------