



Ø65-70 INOX 316

303V/..
downlight



Light distribution

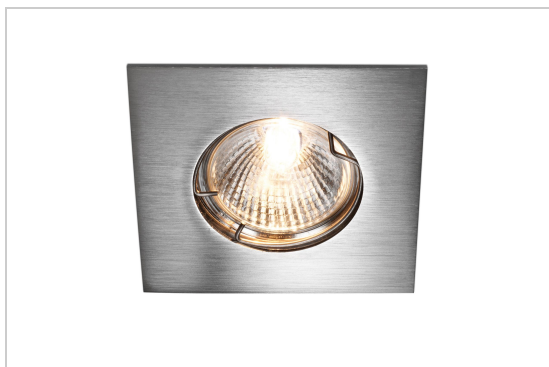

Project _____
Type _____
Nota _____
Quantity _____
Date _____

Lamp

(Bulb not included)

Lamp type	QR-CB 51
Lamp base	GU5,3/GX5,3
Quantity	1
Power	50W
Voltage	12V

Physical

Use type	Interior + exterior
Fixation type	Ceiling
Type of opening	Round
Aperture dimensions	Ø65-70 mm
Installation depth	65 mm
Dimensions fixture	85x85x55 mm
Spring type	S2 - flat springs
IP protection rating	IP20
Weight	0,1564 kg

Electrical

Connection voltage	~12V
Fixture class	III
Type of transformer	Without transformer
Light source replaceability	Replaceable light source by an end-user

Ø65-70 INOX 316

303V/..
downlight

Colours

	31MX	white texture	303V.31MX
	32X	black texture	303V.32X
	33MX	brown texture	303V.33MX
	37X	grey texture	303V.37X
	5	inox 316	303V.5
	5B	inox 316 1x coated	303V.5B
	5BB	inox 316 2x coated	303V.5BB
	63X	umbra grey	303V.63X
	64X	black grey	303V.64X

Options

S6.65/..	plasterkit	PLASTERKIT
300V.12V/..	supplement for downlight - waterproof fitting - without LED driver	FITTING IP54