


LUXOR - SPINNER

4073/..
downlight



Light distribution

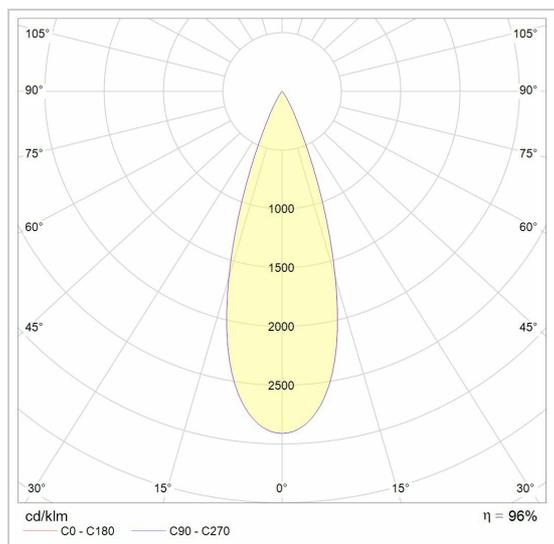

Project _____
Type _____
Nota _____
Quantity _____
Date _____

LED

Lamp type	Led
Quantity	3
Power	8,7W
Current	500mA
Kelvin	2700K 4000K
Lumen	1145
CRI	90


Physical

Use type	Interior
Fixation type	Ceiling
Type of opening	Rectangle
Aperture dimensions	453x152 mm
Installation depth	170 mm
Dimensions fixture	455x160x160 mm
Reflector	Ø111 mm
Spring type	IbIS4
Directional	In both planes
IP protection rating	IP20
Reflector	40°

Electrical

Connection current	=500mA
Fixture class	III
LED driver	Not included
Light source replaceability	Replaceable (LED only) light source by a professional

Instructies aansluiting

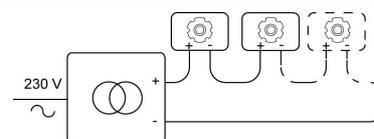



Groendreef 60, 9880 Aalter, Belgium
T +32 9 374 19 51 - info@psmlighting.be
www.psmlighting.be

Project _____
Type _____
Nota _____
Quantity _____
Date _____

LUXOR - SPINNER

4073/..
downlight

Colours

	1M white texture	4073.1M.WW NW
	2M black tex	4073.2M.WW NW
	77 white - black in	4073.77.WW NW

Options

1853A/..	plasterkit 3 modules - square	SPINNER X plasterkit
----------	-------------------------------	----------------------