



KOZA X Ø164 CRI 80.IP20

1767.1300.IP20/..
downlight



Light distribution

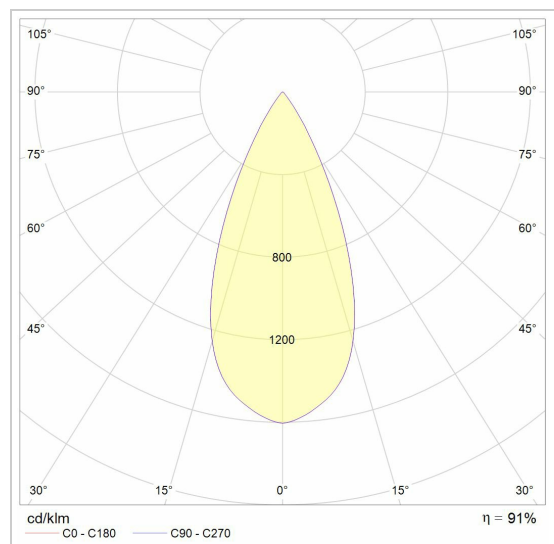

Project _____
Type _____
Nota _____
Quantity _____
Date _____

LED

Lamp type	Led
Quantity	1
Power	9,5W
Current	700mA
Kelvin	2700K 3000K
Lumen	1300
CRI	83


Physical

Use type	Interior
Fixation type	Ceiling
Type of opening	Round
Aperture dimensions	Ø164 mm
Installation depth	173 mm
Dimensions fixture	ø172x153 mm
Reflector	Ø155 mm
Spring type	S1 - torsion springs
IP protection rating	IP20
Reflector	52°

Electrical

Connection current	=700mA
Fixture class	III
LED driver	Not included
Light source replaceability	Replaceable (LED only) light source by a professional
Energy efficiency	D

Instructies aansluiting

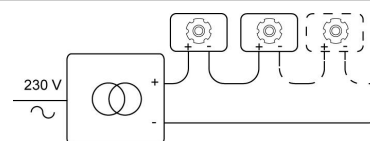



Groendreef 60, 9880 Aalter, Belgium
T +32 9 374 19 51 - info@psmlighting.be
www.psmlighting.be

Project _____

Type _____

Nota _____

Quantity _____

Date _____

KOZA X Ø164 CRI 80.IP20

1767.1300.IP20/..
downlight

Colours

	11M grey tex	1767.1300.IP20.11M.WW WW WW WW NW NW NW NW
	14 alu satin	1767.1300.IP20.14.WW WW WW WW NW NW NW NW
	1M white texture	1767.1300.IP20.1M.WW WW WW WW NW NW NW NW
	2M black tex	1767.1300.IP20.2M.WW WW WW WW NW NW NW NW