



Project _____
Type _____
Nota _____
Quantity _____
Date _____

NOVA LED SB+BOMBA + DRIVER

555.10015/..
downlight



Light distribution

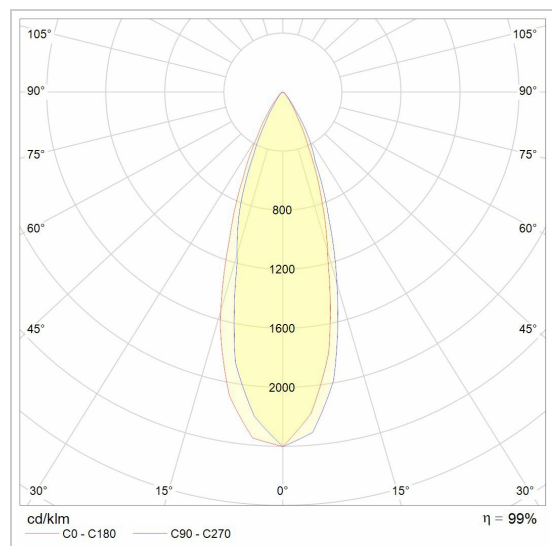

LED

| | |
|-----------|---------------|
| Lamp type | Led |
| Quantity | 1 |
| Power | 8W |
| Current | 180mA |
| Kelvin | 2700K 3000K |
| Lumen | 670 |
| CRI | 98 |


Physical

| | |
|----------------------|-------------------|
| Use type | Interior |
| Fixation type | Ceiling |
| Type of opening | Round |
| Aperture dimensions | Ø80 mm |
| Installation depth | 80 mm |
| Dimensions fixture | 100x100x70 mm |
| Spring type | S2 - flat springs |
| IP protection rating | IP20 |
| Reflector | 36° |
| Weight | 0,3850 kg |

Electrical

| | |
|-----------------------------|---|
| Connection voltage | ~230V |
| Fixture class | II |
| LED driver | Included |
| Dimmable | Led C |
| Control gear replaceability | Replaceable control gear by a professional |
| Light source replaceability | Replaceable (LED only) light source by a professional |
| Energy efficiency | G |

Instructies aansluiting








Groendreef 60, 9880 Aalter, Belgium
T +32 9 374 19 51 - info@psmlighting.be
www.psmlighting.be

Project _____
Type _____
Nota _____
Quantity _____
Date _____

NOVA LED SB+BOMBA + DRIVER

555.10015/..
downlight

Colours

| | | |
|--|------------------|----------------------|
|  | 14 alu satin | 555.10015.14.WW NW |
|  | 1M white texture | 555.10015.1M.WW NW |
|  | 2M black tex | 555.10015.2M.WW NW |

Options

| | | |
|-------------|------------------------------------|---------------------|
| S1/.. | supplement - set torsion springs | SET TORSION SPRINGS |
| NOVA.D15/.. | accessory for downlight - Lens 15° | NOVA LED LENS |
| NOVA.D60/.. | accessory for downlight - Lens 60° | NOVA LED LENS |