


Project \_\_\_\_\_  
Type \_\_\_\_\_  
Nota \_\_\_\_\_  
Quantity \_\_\_\_\_  
Date \_\_\_\_\_

## CAMELEON XICATO LED

1572.S1/..  
downlight



### Light distribution

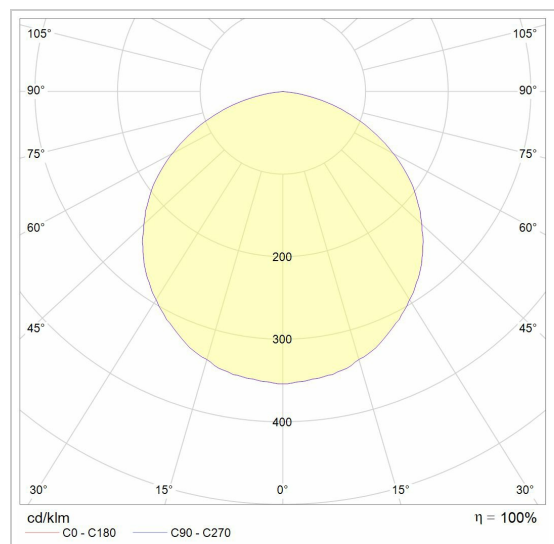

### LED

Lamp type	Led
Quantity	1
Power	9,5W
Current	700mA
Kelvin	2700K   3000K
Lumen	1300
CRI	83

### Physical

Use type	Interior
Fixation type	Ceiling
Type of opening	Round
Aperture dimensions	Ø80 mm
Installation depth	125 mm
Dimensions fixture	ø89x120 mm
Spring type	S1 - torsion springs
IP protection rating	IP20
Reflector	90°
Weight	0,2800 kg

### Electrical

Connection current	=700mA
Fixture class	III
LED driver	Not included
Light source replaceability	Replaceable (LED only) light source by a professional
Energy efficiency	D

Instructies aansluiting





Groendreef 60, 9880 Aalter, Belgium  
T +32 9 374 19 51 - info@psmlighting.be  
www.psmlighting.be

Project \_\_\_\_\_  
Type \_\_\_\_\_  
Nota \_\_\_\_\_  
Quantity \_\_\_\_\_  
Date \_\_\_\_\_

## CAMELEON XICATO LED

1572.S1/..  
downlight

### Colours

	14	alu satin	1572.S1.14.WW   NW
	1M	white texture	1572.S1.1M.WW   NW
	28	rosé	1572.S1.28.WW   NW
	2M	black tex	1572.S1.2M.WW   NW
	45	sun gold	1572.S1.45.WW   NW