


CAMELEON XICATO LED

1572.S2/..
downlight



Light distribution

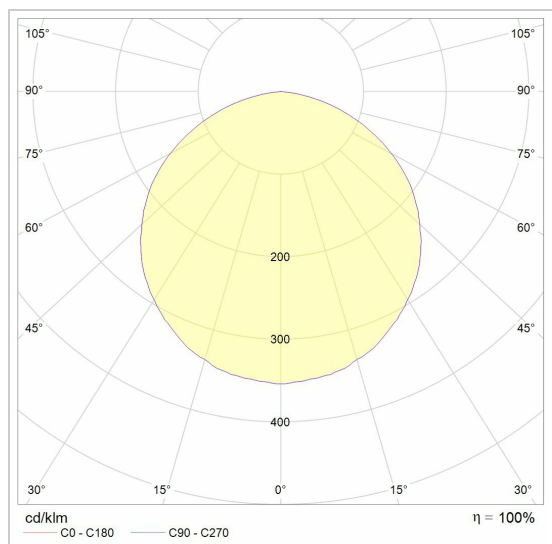

Project _____
Type _____
Nota _____
Quantity _____
Date _____

LED

Lamp type	Led
Quantity	1
Power	9,5W
Current	700mA
Kelvin	2700K 3000K
Lumen	1300
CRI	83

Physical

Use type	Interior
Fixation type	Ceiling
Type of opening	Round
Aperture dimensions	Ø80 mm
Installation depth	125 mm
Dimensions fixture	ø89x120 mm
Spring type	S2 - flat springs
IP protection rating	IP20
Reflector	90°
Weight	0,2871 kg

Electrical

Connection current	=700mA
Fixture class	III
LED driver	Not included
Light source replaceability	Replaceable (LED only) light source by a professional
Energy efficiency	D

Instructies aansluiting



CAMELEON XICATO LED

1572.S2/..
downlight

Colours

	14 alu satin	1572.S2.14.NW WW NW WW NW WW NW WW NW WW WW NW NW NW WW WW NW WW WW
	1M white texture	1572.S2.1M.NW WW NW WW NW WW NW WW NW WW WW NW NW NW WW WW NW WW WW
	28 rosé	1572.S2.28.NW WW NW WW NW WW NW WW NW WW WW NW NW NW WW WW NW WW WW
	2M black tex	1572.S2.2M.NW WW NW WW NW WW NW WW NW WW WW NW NW NW WW WW NW WW WW
	45 sun gold	1572.S2.45.NW WW NW WW NW WW NW WW NW WW WW NW NW NW WW WW NW WW WW

Options

TR122260/..	multi driver - DC JOLLY MD 17W - 350mA 24W - 500mA 32W - 700mA push + leading and trailing edge	MULTI DRIVER
-------------	--	-----------------