


CAPA X

7600.1200.DC/..
spotlight



Light distribution

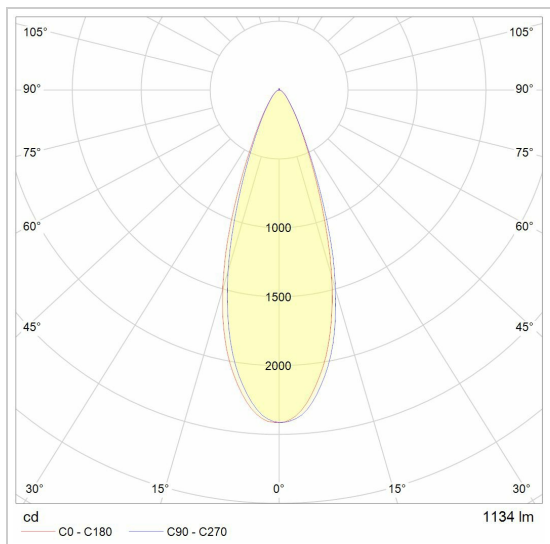

Project _____
Type _____
Nota _____
Quantity _____
Date _____

LED

Lamp type	Led
Quantity	1
Power	12,2W
Current	350mA
Kelvin	2700K 3000K 4000K
Lumen	1200
CRI	92


Physical

Use type	Interior
Fixation type	Ceiling or wall
Dimensions fixture	ø58x180 mm
Head	Ø58xH130 mm
Directional	In both planes
IP protection rating	IP20
Reflector	36°
Weight	0,2786 kg

Electrical

Connection current	≈350mA
Fixture class	III
LED driver	Not included
Light source replaceability	Replaceable (LED only) light source by a professional
Energy efficiency	F

Instructies aansluiting

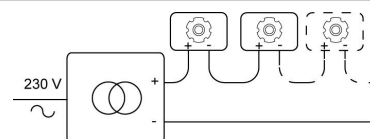

CAPA X

7600.1200.DC/..
spotlight

Colours

	14 alu satin	7600.1200.DC.14.NW NW NW NW NW NW WW WW WW WW WW WW CW CW CW CW CW CW WW NW WW WW WW WW
	16 satin gold	7600.1200.DC.16.NW NW NW NW NW NW WW WW WW WW WW WW CW CW CW CW CW CW WW NW WW WW WW WW
	1M white texture	7600.1200.DC.1M.NW NW NW NW NW NW WW WW WW WW WW WW CW CW CW CW CW CW WW NW WW WW WW WW
	2M black tex	7600.1200.DC.2M.NW NW NW NW NW NW WW WW WW WW WW WW CW CW CW CW CW CW WW NW WW WW WW WW
	4 shiny gold	7600.1200.DC.4.NW NW NW NW NW NW WW WW WW WW WW WW CW CW CW CW CW CW WW NW WW WW WW WW
	45 sun gold	7600.1200.DC.45.NW NW NW NW NW NW WW WW WW WW WW WW CW CW CW CW CW CW WW NW WW WW WW WW

Options

002/..	rosette to build in - round	ROSETTE IN
005/..	built-up base - round	ROSETTE UP
TR89800255/..	driver - square - LCBI 15W - 350mA leading and trailing edge	DRIVER 350mA
TR28002403/..	driver - 14W - 350mA fixC R ADV	DRIVER 350mA