


Project \_\_\_\_\_  
Type \_\_\_\_\_  
Nota \_\_\_\_\_  
Quantity \_\_\_\_\_  
Date \_\_\_\_\_


## Ø80-82 EQUAL CLICK SYSTEM

E-CLICKAQUA.AC/..

built-in cassette



### Light distribution

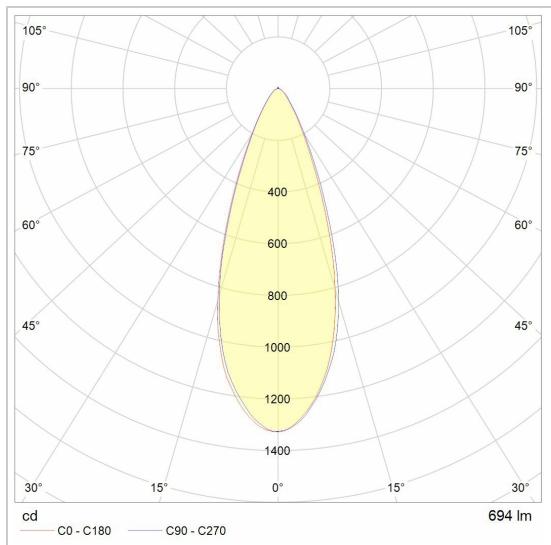

### LED

Lamp type	Led
Quantity	1
Power	9,4W
Voltage	230V
Kelvin	2700K   3000K
Lumen	800
CRI	92

### Physical

Use type	Interior
Fixation type	Ceiling
Installation depth	130 mm
Dimensions fixture	ø72x110 mm
IP protection rating	IP20
Reflector	36°
Weight	0,3150 kg

### Electrical

Connection voltage	~230V
Fixture class	I
Dimmable	Led C
Light source replaceability	Replaceable (LED only) light source by and end user
Energy efficiency	F
Energy efficiency	G



Groendreef 60, 9880 Aalter, Belgium  
T +32 9 374 19 51 - info@psmlighting.be  
www.psmlighting.be

Project \_\_\_\_\_  
Type \_\_\_\_\_  
Nota \_\_\_\_\_  
Quantity \_\_\_\_\_  
Date \_\_\_\_\_

## Ø80-82 EQUAL CLICK SYSTEM

E-CLICKAQUA.AC/..

built-in cassette

### Colours

	14 alu satin	E-CLICKAQUA.AC.14.NW   NW   NW   NW   NW   WW   WW   WW   WW   NW   NW   NW   WW   WW
	1M white texture	E-CLICKAQUA.AC.1M.NW   NW   NW   NW   NW   WW   WW   WW   WW   NW   NW   NW   WW   WW
	2M black tex	E-CLICKAQUA.AC.2M.NW   NW   NW   NW   NW   WW   WW   WW   WW   NW   NW   NW   WW   WW
	45 sun gold	E-CLICKAQUA.AC.45.NW   NW   NW   NW   NW   WW   WW   WW   WW   NW   NW   NW   WW   WW

### Options

E- TUBE.120/..	ceiling light for downlight ECS - round - to be ordered separately	Ø80-82 ECS - BUILT UP
E- TUBE.140/..	ceiling light for downlight ECS - round - to be ordered separately	Ø80-82 ECS - BUILT UP
E- TUBE.165/..	ceiling light for downlight ECS - round - to be ordered separately	Ø80-82 ECS - BUILT UP