


ZITA SLO - T3

ZITA35M/..
downlight



Light distribution

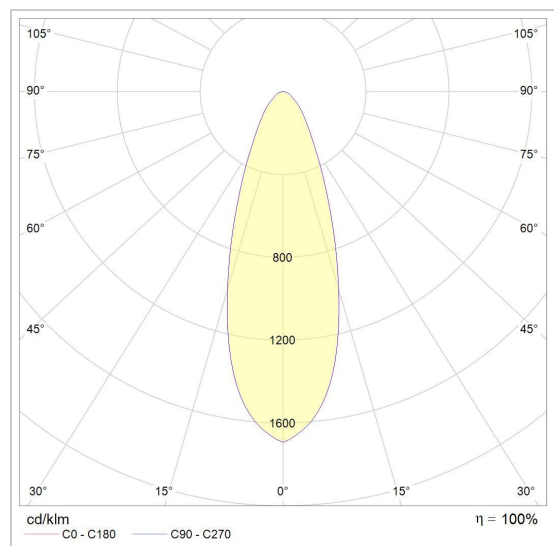

Project _____
Type _____
Nota _____
Quantity _____
Date _____

LED

Lamp type	Led
Quantity	1
Power	6,2W
Current	350mA
Kelvin	2700K 3000K 4000K
Lumen	735
CRI	90

Physical

Use type	Interior
Fixation type	Ceiling
Type of opening	Round
Aperture dimensions	Ø39-40 mm
Installation depth	75 mm
Dimensions fixture	ø44,5x71 mm
Spring type	S2 - flat springs
IP protection rating	IP20
Reflector	36°
Weight	0,1375 kg

Electrical

Connection current	=350mA
Fixture class	III
LED driver	Not included
Light source replaceability	Replaceable (LED only) light source by a professional
Energy efficiency	E

Instructies aansluiting



ZITA SLO - T3

ZITA35M/..
downlight

Colours

	1	white gloss	ZITA35M.1.WW CW NW
	11	alu grey	ZITA35M.11.WW CW NW
	13	bronze	ZITA35M.13.WW CW NW
	14	alu satin	ZITA35M.14.WW CW NW
	16	satin gold	ZITA35M.16.WW CW NW
	1M	white texture	ZITA35M.1M.WW CW NW
	2	black matt	ZITA35M.2.WW CW NW
	23	dark bronze	ZITA35M.23.WW CW NW
	2M	black tex	ZITA35M.2M.WW CW NW
	4	shiny gold	ZITA35M.4.WW CW NW

Options

TR127040/..	driver - square - MICRO MD 10W - 350mA leading and trailing edge	DRIVER 350mA
SLO_T3_D30/..	led module - LED module - lens - without LED driver	LEDMODULE T3
SLO_T3_D45/..	led module - LED module - lens - without LED driver	LEDMODULE T3