



Ø65 SLO - T1

SIRA.SLO/..
downlight



Light distribution

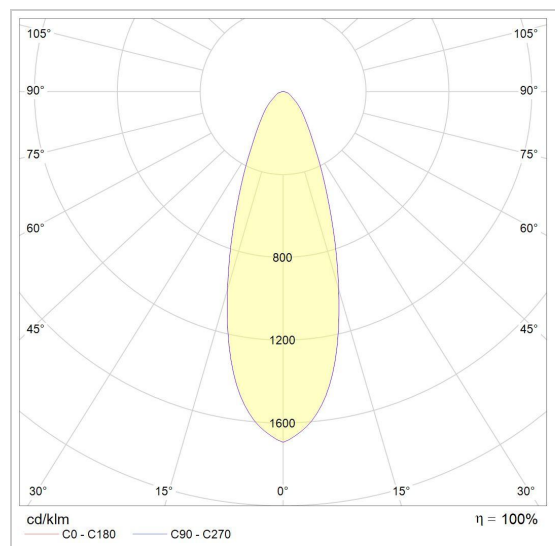

Project _____
Type _____
Nota _____
Quantity _____
Date _____

LED

Lamp type	Led
Quantity	1
Power	6,2W
Current	350mA
Kelvin	2700K 3000K 4000K
Lumen	735
CRI	90

Physical

Use type	Interior
Fixation type	Ceiling
Type of opening	Round
Aperture dimensions	Ø65 mm
Installation depth	100 mm
Dimensions fixture	ø75x92 mm
Spring type	S2 - flat springs
IP protection rating	IP20
Reflector	36°
Weight	0,2050 kg

Electrical

Connection current	≈350mA
Fixture class	III
LED driver	Not included
Light source replaceability	Replaceable (LED only) light source by a professional
Energy efficiency	E

Instructies aansluiting





Groendreef 60, 9880 Aalter, Belgium
T +32 9 374 19 51 - info@psmlighting.be
www.psmlighting.be

Project _____
Type _____
Nota _____
Quantity _____
Date _____

Ø65 SLO - T1

SIRA.SLO/..
downlight

Colours

	14 alu satin	SIRA.SLO.14.NW CW CW NW CW NW NW CW WW WW WW WW NW WW
	1M white texture	SIRA.SLO.1M.NW CW CW NW CW NW NW CW WW WW WW WW NW WW
	2M black tex	SIRA.SLO.2M.NW CW CW NW CW NW NW CW WW WW WW WW NW WW
	45 sun gold	SIRA.SLO.45.NW CW CW NW CW NW NW CW WW WW WW WW NW WW

Options

S1/..	supplement - set torsion springs	SET TORSION SPRINGS
TR127040/..	driver - square - MICRO MD 10W - 350mA leading and trailing edge	DRIVER 350mA
SLO_T1_D15/..	led module - LED module - lens - without LED driver	LEDMODULE T1
SLO_T1_D30/..	led module - LED module - lens - without LED driver	LEDMODULE T1
SLO_T1_D45/..	led module - LED module - lens - without LED driver	LEDMODULE T1