




## FLUX INOX 316 Ø82

3178/..  
downlight

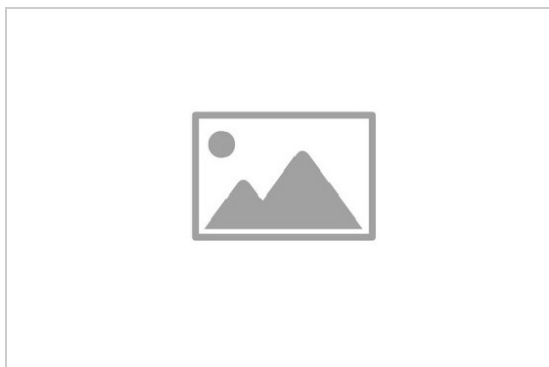

### Light distribution

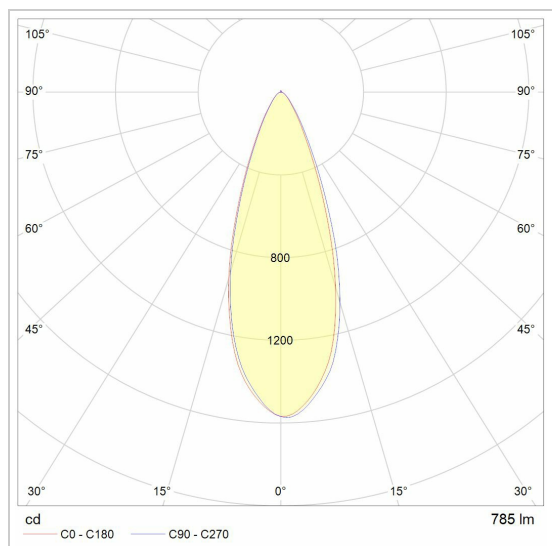

Project \_\_\_\_\_  
Type \_\_\_\_\_  
Nota \_\_\_\_\_  
Quantity \_\_\_\_\_  
Date \_\_\_\_\_

### LED

Lamp type	Led
Quantity	1
Power	8,8W
Current	250mA
Kelvin	2700K   3000K
Lumen	700
CRI	92

### Physical

Use type	Interior + exterior
Fixation type	Ceiling
Type of opening	Round
Aperture dimensions	Ø82 mm
Installation depth	100 mm
Dimensions fixture	ø95x80 mm
Spring type	S1 - torsion springs
IP protection rating	IP44
Reflector	36°
Weight	0,3183 kg

### Electrical

Connection current	=250mA
Fixture class	III
LED driver	Not included
Light source replaceability	Replaceable (LED only) light source by a professional
Energy efficiency	F
Energy efficiency	G









Groendreef 60, 9880 Aalter, Belgium  
T +32 9 374 19 51 - info@psmlighting.be  
www.psmlighting.be

Project \_\_\_\_\_  
Type \_\_\_\_\_  
Nota \_\_\_\_\_  
Quantity \_\_\_\_\_  
Date \_\_\_\_\_

## FLUX INOX 316 Ø82

3178/..  
downlight

### Colours

	31MX	white texture	<b>3178.31MX.WW   NW</b>
	32X	black texture	<b>3178.32X.WW   NW</b>
	33MX	brown texture	<b>3178.33MX.WW   NW</b>
	37X	grey texture	<b>3178.37X.WW   NW</b>
	5	inox 316	<b>3178.5.WW   NW</b>
	5BB	inox 316 2x coated	<b>3178.5BB.WW   NW</b>

### Options

TR127556/... multi driver - MINI JOLLY DC | 12W - 250mA | 17W - 350mA | 20W - MULTI  
500mA/700mA | leading and trailing edge DRIVER