




UFO LED

T7004.5M/..
bollard with spike

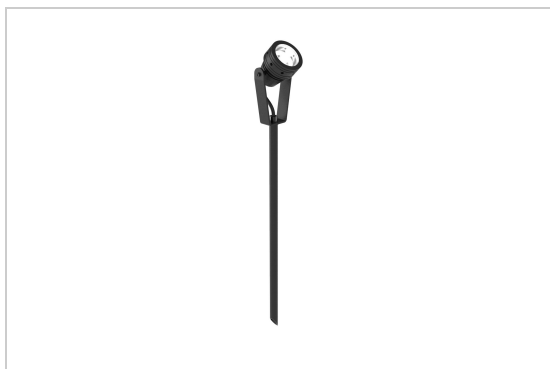

Light distribution

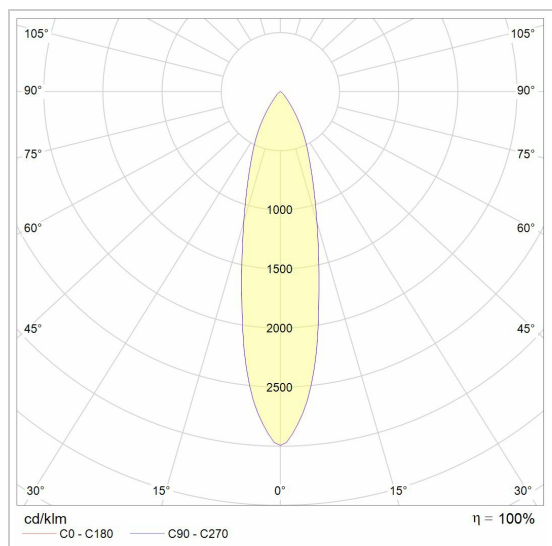

Project _____

Type _____

Nota _____

Quantity _____

Date _____

LED

Lamp type	Led
Quantity	1
Power	4W
Voltage	230V
Kelvin	2700K 3000K
Lumen	350
CRI	90

Physical

Use type	Exterior
Fixation type	Floor
Dimensions fixture	ø60x530 mm
Cable	L5000 mm
Head	Ø60 mm
SPIKE	Ø12xH400 mm
Rod	400 mm
Directional	In both planes
IP protection rating	IP54
Reflector	30°
Weight	1,1850 kg

Electrical

Connection voltage	~230V
Fixture class	I
Dimmable	Led C
Light source replaceability	Replaceable (LED only) light source by a professional
Energy efficiency	F









Groendreef 60, 9880 Aalter, Belgium
T +32 9 374 19 51 - info@psmlighting.be
www.psmlighting.be

Project _____
Type _____
Nota _____
Quantity _____
Date _____

UFO LED

T7004.5M/..
bollard with spike

Colours

	32AX	black tex ano	T7004.5M.32AX.WW NW
	37AX	grey texture ano	T7004.5M.37AX.WW NW
	46AX	grey-brown ano	T7004.5M.46AX.WW NW
	5	inox 316	T7004.5M.5.WW NW
	5BB	inox 316 2x coated	T7004.5M.5BB.WW NW
	64AX	black grey ano	T7004.5M.64AX.WW NW