


Groendreef 60, 9880 Aalter, Belgium
T +32 9 374 19 51 - info@psmlighting.be
www.psmlighting.be

Project _____
Type _____
Nota _____
Quantity _____
Date _____


NOVA FLAT LED SB+DIVA + DRIVER

444.10013/..

downlight



Light distribution

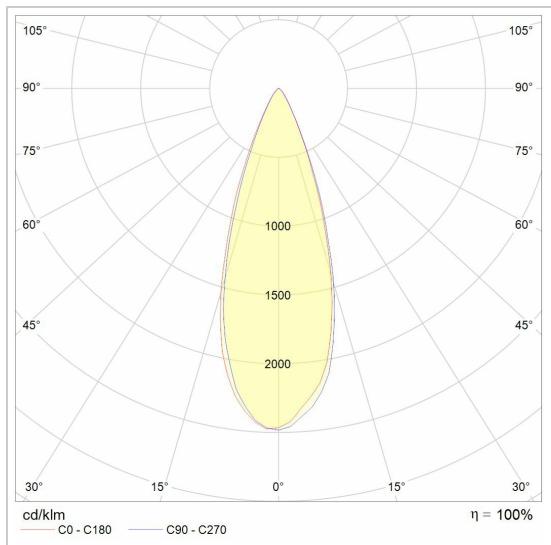

LED

Lamp type	Led
Quantity	1
Power	6W
Current	120mA
Kelvin	2700K 3000K
Lumen	450
CRI	98


Physical

Use type	Interior
Fixation type	Ceiling
Type of opening	Round
Aperture dimensions	Ø80 mm
Installation depth	45 mm
Dimensions fixture	100x100x35 mm
Spring type	S2 - flat springs
Directional	In both planes
IP protection rating	IP20
Reflector	36°
Weight	0,3275 kg

Electrical

Connection voltage	~230V
Fixture class	II
LED driver	Included
Dimmable	Led C
Control gear replaceability	Replaceable control gear by a professional
Light source replaceability	Replaceable (LED only) light source by a professional
Energy efficiency	G

Instructies aansluiting





Groendreef 60, 9880 Aalter, Belgium
T +32 9 374 19 51 - info@psmlighting.be
www.psmlighting.be

Project _____
Type _____
Nota _____
Quantity _____
Date _____

NOVA FLAT LED SB+DIVA + DRIVER

444.10013/..
downlight

Colours

	14 alu satin	444.10013.14.WW WW WW NW NW NW NW WW
	1M white texture	444.10013.1M.WW WW WW NW NW NW NW WW
	2M black tex	444.10013.2M.WW WW WW NW NW NW NW WW

Options

S1/..	supplement - set torsion springs	SET TORSION SPRINGS
NOVA.D15/..	accessory for downlight - Lens 15°	NOVA LED LENS
NOVA.D60/..	accessory for downlight - Lens 60°	NOVA LED LENS