



## LUXOR Ø100 QR70 PICO

XTM.1300.10039.S1/..  
downlight



### Light distribution

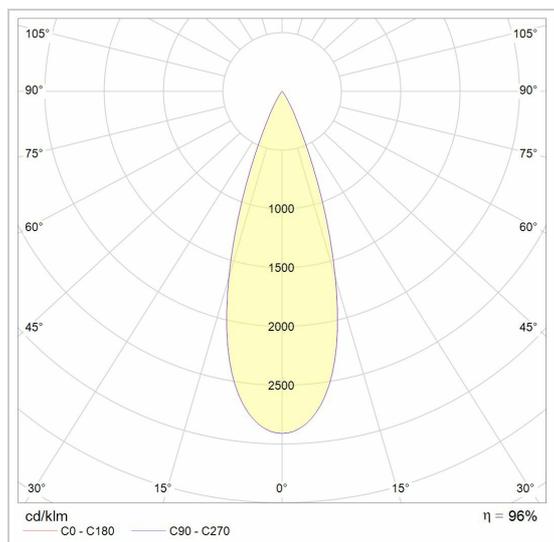

Project \_\_\_\_\_  
Type \_\_\_\_\_  
Nota \_\_\_\_\_  
Quantity \_\_\_\_\_  
Date \_\_\_\_\_

### LED

|           |               |
|-----------|---------------|
| Lamp type | Led           |
| Quantity  | 1             |
| Power     | 11,4W         |
| Current   | 700mA         |
| Kelvin    | 2700K   4000K |
| Lumen     | 1300          |
| CRI       | 90            |


### Physical

|                      |                      |
|----------------------|----------------------|
| Use type             | Interior             |
| Fixation type        | Ceiling              |
| Type of opening      | Round                |
| Aperture dimensions  | ø110 mm              |
| Dimensions fixture   | 120x120x110 mm       |
| Reflector            | Ø70 mm               |
| Spring type          | S1 - torsion springs |
| IP protection rating | IP20                 |
| Reflector            | 40°                  |

### Electrical

|                             |   |
|-----------------------------|---|
| Connection current          | =700mA  |
| Fixture class               | III   |
| LED driver                  | Not included  |
| Light source replaceability | Replaceable (LED only) light source by a professional |
| Energy efficiency           | E   |

Instructies aansluiting

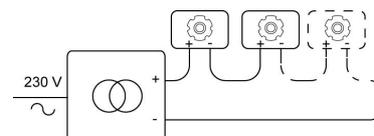



Groendreef 60, 9880 Aalter, Belgium  
T +32 9 374 19 51 - info@psmlighting.be  
www.psmlighting.be

Project \_\_\_\_\_  
Type \_\_\_\_\_  
Nota \_\_\_\_\_  
Quantity \_\_\_\_\_  
Date \_\_\_\_\_

## LUXOR Ø100 QR70 PICO

XTM.1300.10039.S1/..  
downlight

### Colours

|  |                  |  |
|--|------------------|--|
|  | 14 alu satin     | XTM.1300.10039.S1.14.WW   WW   WW   WW   NW   NW   NW   NW |
|  | 1M white texture | XTM.1300.10039.S1.1M.WW   WW   WW   WW   NW   NW   NW   NW |
|  | 2M black tex     | XTM.1300.10039.S1.2M.WW   WW   WW   WW   NW   NW   NW   NW |