



## LUXOR Ø80 SB+BOMBA

XTM.1300.10015.S2/..  
downlight



### Light distribution

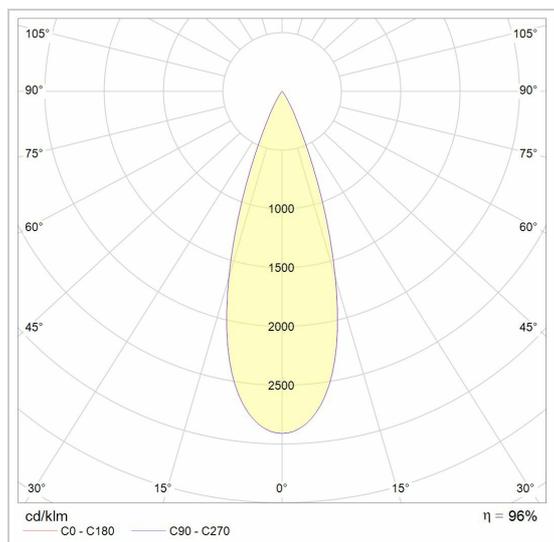

Project \_\_\_\_\_  
Type \_\_\_\_\_  
Nota \_\_\_\_\_  
Quantity \_\_\_\_\_  
Date \_\_\_\_\_

### LED

Lamp type	Led
Quantity	1
Power	11,4W
Current	700mA
Kelvin	2700K   3000K
Lumen	1300
CRI	90


### Physical

Use type	Interior
Fixation type	Ceiling
Type of opening	Round
Aperture dimensions	Ø80 mm
Installation depth	120 mm
Dimensions fixture	100x100x100 mm
Reflector	ø50 mm
Spring type	S2 - flat springs
IP protection rating	IP20
Reflector	40°

### Electrical

Connection current	=700mA
Fixture class	III
LED driver	Not included
Light source replaceability	Replaceable (LED only) light source by a professional
Energy efficiency	E

Instructies aansluiting

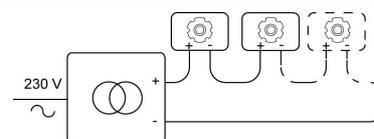



Groendreef 60, 9880 Aalter, Belgium  
T +32 9 374 19 51 - info@psmlighting.be  
www.psmlighting.be

Project \_\_\_\_\_  
Type \_\_\_\_\_  
Nota \_\_\_\_\_  
Quantity \_\_\_\_\_  
Date \_\_\_\_\_

## LUXOR Ø80 SB+BOMBA

XTM.1300.10015.S2/..  
downlight

### Colours

	14 alu satin	XTM.1300.10015.S2.14.WW   NW
	1M white texture	XTM.1300.10015.S2.1M.WW   NW
	2M black tex	XTM.1300.10015.S2.2M.WW   NW