



LUXOR Ø80 TB+JOJO

XTM.1300.10043.S1/..
downlight



Light distribution

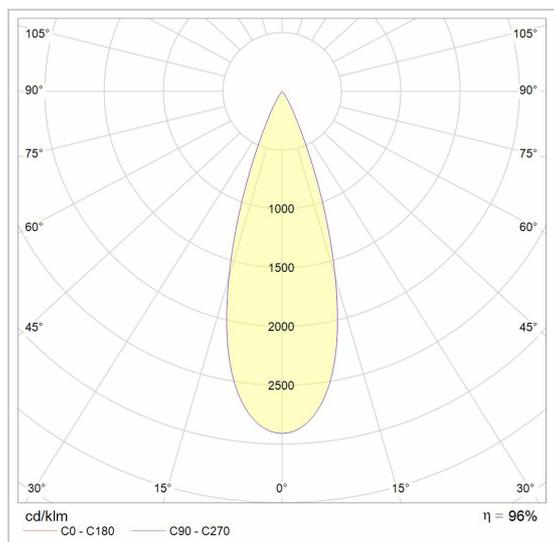

Project _____
Type _____
Nota _____
Quantity _____
Date _____

LED

Lamp type	Led
Quantity	2
Power	11,4W
Current	700mA
Kelvin	2700K 4000K
Lumen	1300
CRI	90


Physical

Use type	Interior
Fixation type	Ceiling
Type of opening	Round
Aperture dimensions	2xØ80 mm
Dimensions fixture	180x100x100 mm
Reflector	ø50 mm
Centre distance	85 mm
Spring type	S1 - torsion springs
IP protection rating	IP20
Reflector	40°

Electrical

Connection current	=700mA
Fixture class	III
LED driver	Not included
Light source replaceability	Replaceable (LED only) light source by a professional
Energy efficiency	E

Instructies aansluiting

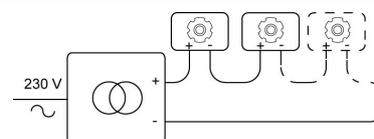



Groendreef 60, 9880 Aalter, Belgium
T +32 9 374 19 51 - info@psmlighting.be
www.psmlighting.be

Project _____
Type _____
Nota _____
Quantity _____
Date _____

LUXOR Ø80 TB+JOJO

XTM.1300.10043.S1/..
downlight

Colours

	14 alu satin	XTM.1300.10043.S1.14.WW WW WW WW NW NW NW NW
	1M white texture	XTM.1300.10043.S1.1M.WW WW WW WW NW NW NW NW
	2M black tex	XTM.1300.10043.S1.2M.WW WW WW WW NW NW NW NW