


LIPSTICK

1848/..
spotlight with flexible tube



Light distribution

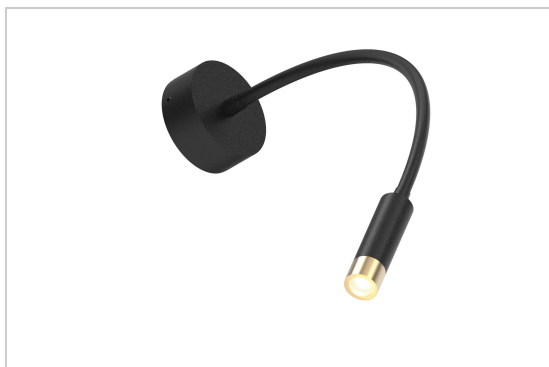

Project _____
Type _____
Nota _____
Quantity _____
Date _____

LED

Lamp type	Led
Quantity	1
Power	1,7W
Current	500mA
Kelvin	2950K
Lumen	168
CRI	80

Physical

Use type	Interior
Fixation type	Wall
Dimensions fixture	ø60x395 mm
Base	Ø60xH25 mm
Head	Ø20xH70 mm
Flex	300 mm
Directional	In both planes
IP protection rating	IP20
Reflector	25°
Weight	0,4240 kg

Electrical

Connection current	=500mA
Fixture class	III
LED driver	Not included
Light source replaceability	Replaceable (LED only) light source by a professional
Energy efficiency	F



Groendreef 60, 9880 Aalter, Belgium
T +32 9 374 19 51 - info@psmlighting.be
www.psmlighting.be

Project _____
Type _____
Nota _____
Quantity _____
Date _____

LIPSTICK

1848/..
spotlight with flexible tube

Colours

	13M	bronze matt	1848.13M.WW
	16	satin gold	1848.16.WW
	162	black - gold	1848.162.WW
	1M	white texture	1848.1M.WW
	216	black - gold	1848.216.WW
	2M	black tex	1848.2M.WW

Options

S1537/..	switching module - supplement switch	LIPSTICK SWITCH
TRMINI500MA/..	driver	DRIVER 500mA