



## MYLA JACOB | DALI ADAPTOR

8584.3978/..

built-up spot with adaptor



### Light distribution

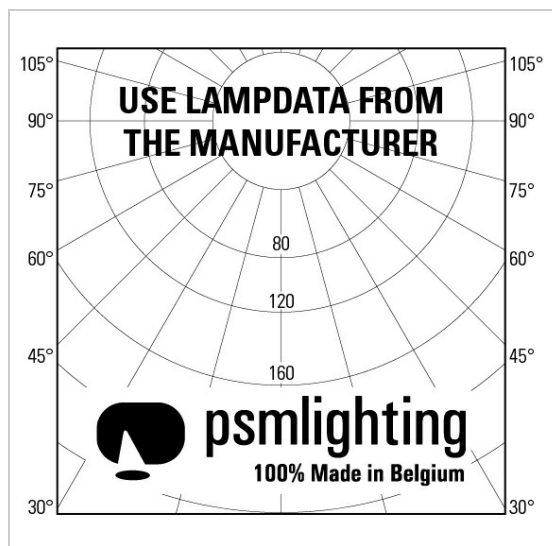

Project	
Type	
Nota	
Quantity	
Date	

### LED

Lamp type	Led
Quantity	1
Power	4W
Current	350mA
Kelvin	2700K   3000K
Lumen	410
CRI	90

### Physical

Use type	Interior
Fixation type	Ceiling or wall
Dimensions fixture	ø40x130 mm
Head	Ø40xH85 mm
Directional	In both planes
IP protection rating	IP20
Reflector	35°
Weight	0,1720 kg

### Electrical

Connection voltage	48V-DC
Fixture class	III
Dimmable	Dali
Control gear replaceability	Replaceable control gear by a professional or psm lighting
Light source replaceability	Replaceable (LED only) light source by a professional
Energy efficiency	G



Groendreef 60, 9880 Aalter, Belgium  
T +32 9 374 19 51 - info@psmlighting.be  
www.psmlighting.be

Project \_\_\_\_\_  
Type \_\_\_\_\_  
Nota \_\_\_\_\_  
Quantity \_\_\_\_\_  
Date \_\_\_\_\_

## MYLA JACOB | DALI ADAPTOR

8584.3978/..

built-up spot with adaptor

### Colours

	1M white texture	8584.3978.1M.WW   WW   NW   NW   NW   WW   WW   NW   WW   WW   NW   WW   WW
	29 black - gold in	8584.3978.29.WW   WW   NW   NW   NW   WW   WW   NW   WW   WW   NW   WW   WW
	2M black tex	8584.3978.2M.WW   WW   NW   NW   NW   WW   WW   NW   WW   WW   NW   WW   WW
	49 white - gold in	8584.3978.49.WW   WW   NW   NW   NW   WW   WW   NW   WW   WW   NW   WW   WW