



CIGARO

2447/..
pendant



Light distribution

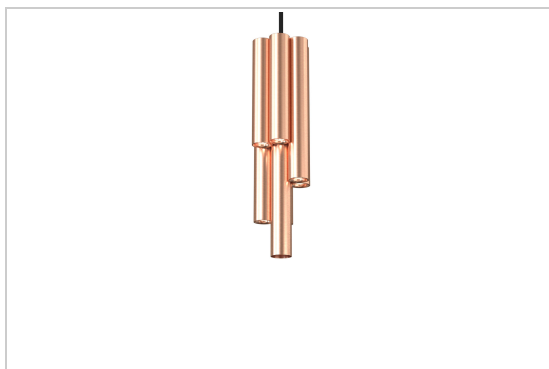

Project _____
Type _____
Nota _____
Quantity _____
Date _____

LED

Lamp type	Led
Quantity	6
Power	4W
Current	350mA
Kelvin	2700K 3000K
Lumen	410
CRI	90

Physical

Use type	Interior
Fixation type	Ceiling suspended
Dimensions fixture	ø84x312 mm
tube	Ø28xH150 mm
tube	Ø28xH200 mm
tube	Ø28xH250 mm
tube	Ø28xH300 mm
Cable	1500 mm
IP protection rating	IP20
Reflector	45°
Weight	3,5000 kg



















Electrical

Connection current	=350mA
Fixture class	III
LED driver	Not included
Light source replaceability	Replaceable (LED only) light source by a professional
Energy efficiency	G

CIGARO

2447/..
pendant

Colours

	13M bronze matt		TX2 black	2447.13M.TX2.WW NW
	14 alu satin		TX2 black	2447.14.TX2.WW NW
	16 satin gold		TX2 black	2447.16.TX2.WW NW
	1M white texture		TX1 white	2447.1M.TX1.WW NW
	230 ALU dark bronze		TX2 black	2447.230.TX2.WW NW
	28 rosé		TX2 black	2447.28.TX2.WW NW
	2M black tex		TX2 black	2447.2M.TX2.WW NW
	4 shiny gold		TX2 black	2447.4.TX2.WW NW
	56 red copper shiny		TX2 black	2447.56.TX2.WW NW

Options

1649/..	built-up base - round - with 2x TR89800255 30W - 350mA - with LED driver	ROSETTE UP + DRIVER
---------	---	------------------------