



## CIGARO

2399/..  
spotlight



### Light distribution

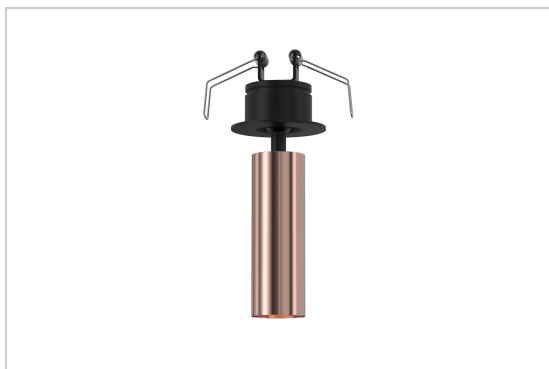

Project \_\_\_\_\_  
Type \_\_\_\_\_  
Nota \_\_\_\_\_  
Quantity \_\_\_\_\_  
Date \_\_\_\_\_

### LED

Lamp type	Led
Quantity	1
Power	4W
Current	350mA
Kelvin	2700K   3000K
Lumen	410
CRI	90

### Physical

Use type	Interior
Fixation type	Ceiling
Type of opening	Round
Aperture dimensions	Ø40 mm
Dimensions fixture	ø50x97 mm
tube	Ø28xH85 mm
Directional	In both planes
IP protection rating	IP20
Reflector	35°
Weight	0,1325 kg

### Electrical

Connection current	=350mA
Fixture class	III
LED driver	Not included
Light source replaceability	Replaceable (LED only) light source by a professional
Energy efficiency	G



Groendreef 60, 9880 Aalter, Belgium  
T +32 9 374 19 51 - info@psmlighting.be  
www.psmlighting.be

Project \_\_\_\_\_  
Type \_\_\_\_\_  
Nota \_\_\_\_\_  
Quantity \_\_\_\_\_  
Date \_\_\_\_\_

## CIGARO

2399/..  
spotlight

### Colours

	132 bronze - black	2399.132.WW   NW
	142 alu - black	2399.142.WW   NW
	162 black - gold	2399.162.WW   NW
	1M white texture	2399.1M.WW   NW
	233 ALU dark bronze - black	2399.233.WW   NW
	282 RC - black	2399.282.WW   NW
	2M black tex	2399.2M.WW   NW
	42 shiny gold - black	2399.42.WW   NW
	562 RC shiny - black	2399.562.WW   NW