



## CIGARO EXCL. DRIVER

2496.1200.6A/..  
pendant



### Light distribution

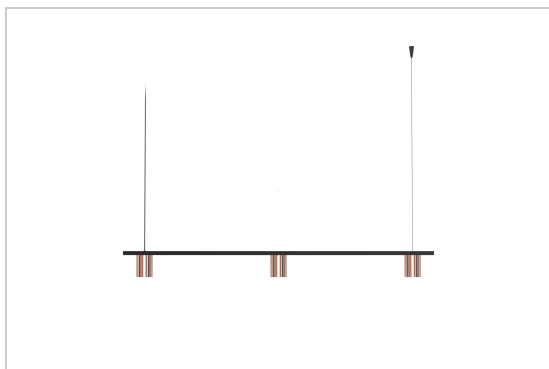

Project \_\_\_\_\_  
Type \_\_\_\_\_  
Nota \_\_\_\_\_  
Quantity \_\_\_\_\_  
Date \_\_\_\_\_

### LED

Lamp type	Led
Quantity	6
Power	4W
Current	350mA
Kelvin	2700K   3000K
Lumen	410
CRI	90

### Physical

Use type	Interior
Fixation type	Ceiling suspended
Dimensions fixture	1200x30x100 mm
tube	Ø28xH85 mm
Cable	1500 mm
IP protection rating	IP20
Reflector	45°

### Electrical

Connection current	=350mA
Fixture class	III
LED driver	Not included
Light source replaceability	Replaceable (LED only) light source by a professional
Energy efficiency	G

Project \_\_\_\_\_

Type \_\_\_\_\_

Nota \_\_\_\_\_

Quantity \_\_\_\_\_

Date \_\_\_\_\_

## CIGARO EXCL. DRIVER

2496.1200.6A/..

pendant

### Colours

	132 bronze - black	2496.1200.6A.132.WW   NW
	142 alu - black	2496.1200.6A.142.WW   NW
	162 black - gold	2496.1200.6A.162.WW   NW
	1M white texture	2496.1200.6A.1M.WW   NW
	233 ALU dark bronze - black	2496.1200.6A.233.WW   NW
	282 RC - black	2496.1200.6A.282.WW   NW
	2M black tex	2496.1200.6A.2M.WW   NW
	42 shiny gold - black	2496.1200.6A.42.WW   NW
	562 RC shiny - black	2496.1200.6A.562.WW   NW