

LUXOR PICO Ø80

333.10010/..
downlight



Light distribution



Project _____
Type _____
Nota _____
Quantity _____
Date _____

LED

Lamp type	Led
Quantity	1
Power	8,7W
Current	500mA
Kelvin	2700K 3000K
Lumen	1145
CRI	90


Physical

Use type	Interior
Fixation type	Ceiling
Type of opening	Round
Aperture dimensions	Ø80 mm
Dimensions fixture	ø90x100 mm
Reflector	ø50 mm
Spring type	S2 - flat springs
IP protection rating	IP20
Reflector	40°
Weight	0,3100 kg

Electrical

Connection current	=500mA
Fixture class	III
LED driver	Not included
Light source replaceability	Replaceable light source by an end-user

Instructies aansluiting

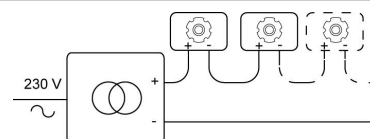



Groendreef 60, 9880 Aalter, Belgium
T +32 9 374 19 51 - info@psmlighting.be
www.psmlighting.be

Project _____

Type _____

Nota _____

Quantity _____

Date _____

LUXOR PICO Ø80

333.10010/..
downlight

Colours

	14	alu satin	333.10010.14.WW NW
	1M	white texture	333.10010.1M.WW NW
	2M	black tex	333.10010.2M.WW NW