

CAMELEON

1571.333.S2/..
downlight



Light distribution



Project _____
Type _____
Nota _____
Quantity _____
Date _____

LED

Lamp type	Led
Quantity	1
Power	8,7W
Current	500mA
Kelvin	2700K 3000K
Lumen	1145
CRI	90


Physical

Use type	Interior
Fixation type	Ceiling
Type of opening	Round
Aperture dimensions	Ø80 mm
Installation depth	125 mm
Dimensions fixture	ø89x120 mm
Spring type	S2 - flat springs
IP protection rating	IP20
Reflector	90°
Weight	0,3300 kg

Electrical

Connection current	=500mA
Fixture class	III
LED driver	Not included
Light source replaceability	Replaceable light source by an end-user

Instructies aansluiting

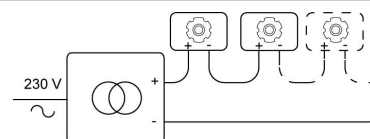

CAMELEON

1571.333.S2/..
downlight

Colours

	13	bronze	1571.333.S2.13.NW WW NW WW NW WW NW WW NW WW WW NW WW WW NW WW NW WW NW WW NW
	13M	bronze matt	1571.333.S2.13M.NW WW NW WW NW WW NW WW NW WW NW WW WW NW WW NW WW NW WW NW
	14	alu satin	1571.333.S2.14.NW WW NW WW NW WW NW WW NW WW NW WW WW NW WW NW WW NW WW NW
	16	satin gold	1571.333.S2.16.NW WW NW WW NW WW NW WW NW WW NW WW WW NW WW NW WW NW WW NW
	1M	white texture	1571.333.S2.1M.NW WW NW WW NW WW NW WW NW WW NW WW WW NW WW NW WW NW WW NW
	23	dark bronze	1571.333.S2.23.NW WW NW WW NW WW NW WW NW WW NW WW WW NW WW NW WW NW WW NW
	28	rosé	1571.333.S2.28.NW WW NW WW NW WW NW WW NW WW NW WW WW NW WW NW WW NW WW NW
	2M	black tex	1571.333.S2.2M.NW WW NW WW NW WW NW WW NW WW NW WW WW NW WW NW WW NW WW NW
	45	sun gold	1571.333.S2.45.NW WW NW WW NW WW NW WW NW WW NW WW WW NW WW NW WW NW WW NW