

## CAMELEON

1574.333.S2/..  
downlight



### Light distribution



Project \_\_\_\_\_  
Type \_\_\_\_\_  
Nota \_\_\_\_\_  
Quantity \_\_\_\_\_  
Date \_\_\_\_\_

### LED

Lamp type	Led
Quantity	1
Power	8,7W
Current	500mA
Kelvin	2700K   3000K
Lumen	1145
CRI	90


### Physical

Use type	Interior
Fixation type	Ceiling
Type of opening	Round
Aperture dimensions	Ø80 mm
Installation depth	125 mm
Dimensions fixture	ø89x120 mm
Spring type	S2 - flat springs
IP protection rating	IP44
Reflector	120°
Weight	0,3000 kg

### Electrical

Connection current	=500mA
Fixture class	III
LED driver	Not included
Light source replaceability	Replaceable light source by an end-user

Instructies aansluiting

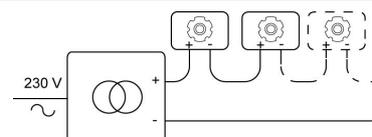



Groendreef 60, 9880 Aalter, Belgium  
T +32 9 374 19 51 - info@psmlighting.be  
www.psmlighting.be

Project \_\_\_\_\_  
Type \_\_\_\_\_  
Nota \_\_\_\_\_  
Quantity \_\_\_\_\_  
Date \_\_\_\_\_

## CAMELEON

1574.333.S2/..  
downlight

### Colours

	14 alu satin	1574.333.S2.14.NW   WW   NW   WW   NW   WW   NW   WW   NW   WW
	1M white texture	1574.333.S2.1M.NW   WW   NW   WW   NW   WW   NW   WW   NW   WW
	28 rosé	1574.333.S2.28.NW   WW   NW   WW   NW   WW   NW   WW   NW   WW
	2M black tex	1574.333.S2.2M.NW   WW   NW   WW   NW   WW   NW   WW   NW   WW
	45 sun gold	1574.333.S2.45.NW   WW   NW   WW   NW   WW   NW   WW   NW   WW