



## CESAR X

W1361.S2/..

built-in ceiling and wall light



### Light distribution

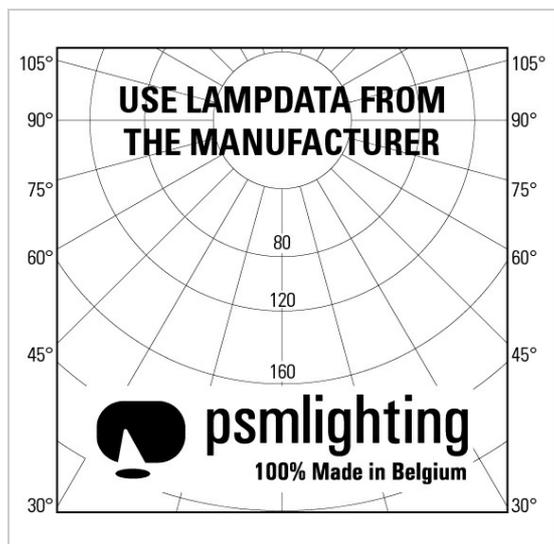

Project \_\_\_\_\_

Type \_\_\_\_\_

Nota \_\_\_\_\_

Quantity \_\_\_\_\_

Date \_\_\_\_\_

### LED

Lamp type	Led
Quantity	1
Power	2,3W
Current	700mA
Kelvin	2700K   3000K   4000K
Lumen	
CRI	


### Physical

Use type	Interior
Fixation type	Ceiling or wall
Type of opening	Round
Aperture dimensions	Ø60 mm
Installation depth	17.5 mm
Dimensions fixture	70x70x17 mm
Spring type	S2 - flat springs
IP protection rating	IP54

### Electrical

Connection current	700mA
Fixture class	III
LED driver	Not included
Light source replaceability	Non-replaceable light source

Instructies aansluiting

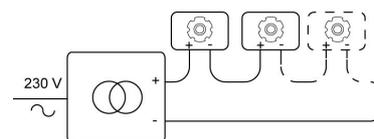



Groendreef 60, 9880 Aalter, Belgium  
T +32 9 374 19 51 - info@psmlighting.be  
www.psmlighting.be

Project \_\_\_\_\_  
Type \_\_\_\_\_  
Nota \_\_\_\_\_  
Quantity \_\_\_\_\_  
Date \_\_\_\_\_

## CESAR X

W1361.S2/..  
built-in ceiling and wall light

### Colours

 37A grey texture ano      W1361.S2.37A.B | WW | CW | NW

---

### Options

S6.60/..	plasterkit	PLASTERKIT
TR122234/..	driver - DC 17W WU   17W - 700mA	DRIVER 700mA

---